




STYLE product catalog

The best machines for single pieces and small series

Machinebuilders since 1991

ZMM conventional lathes

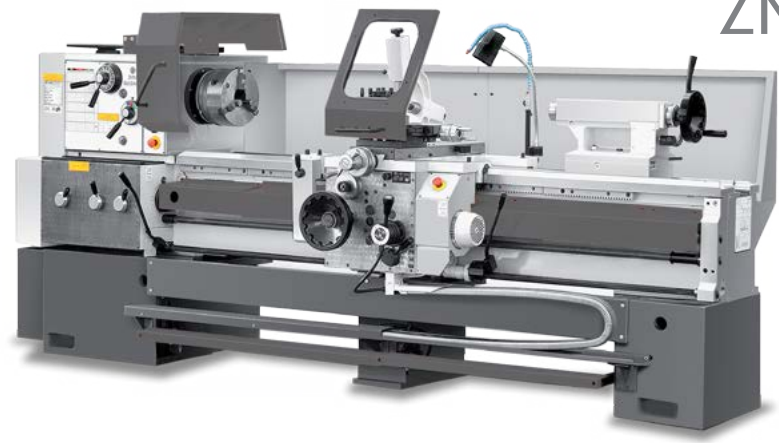

Conventional lathe		From value	to value
Diameter over bed	mm	325	1410
Diameter over support	mm	190	1000
Diameter in sack	mm	440	1500
Spindle bore	mm	32	205
Bedwidth	mm	200	800
Maximum RPM	RPM	315	2240
Distance between centers	mm	500	10000



Lathe 350 - 750 series

Machine		STYLE 350	STYLE 510	STYLE 650	STYLE 750
Swing over bed	mm	380	510	650	750
Swing over support	mm	190	300	430	530
Distance between centers	mm	850	1350 / 1850	900 / 1900 / 2900 / 3900	
Bed width	mm	305	330	450	450
Main motor power (S6)	kW	5.5 / 7.5	7.5 / 11	23 / 27.5 / 35	23 / 27.5 / 35
Max. spindle speed	rpm	3000 / 4000	2500 ⁽⁸⁰⁾ / 2100 ⁽¹⁰²⁾	2000 ⁽¹⁰⁵⁾ / 1500 ⁽¹⁵⁵⁾ / 1250 ⁽¹⁸⁰⁾ / 1000 ⁽²³⁰⁾	
Spindle taper		D1-6	D1-8	D1-11	D1-11 / A2-11 / A2-15
Spindle bore	ø mm	54	80 / 102	105	105 / 155 / 180 / 230
Quill	ø mm	54	75 / 80	105 / 125	105 / 125
Quill stroke	mm	100	150	225	225
Quill taper	MT	4	5	5	5 / 6
Weight	kg	2000	2700 / 3250	4700 / 5700 / 6800 / 7900	



Lathe 1000 - 1200 series

Machine		STYLE 1000	STYLE 1200
Swing over bed	mm	1000	1200
Swing over support	mm	710	910
Distance between centers	mm	2200 / 3200 / 4000 / 5000	
Bed width	mm		560
Main motor power (S6)	kW		27.5 / 35
Max. spindle speed	rpm	600 / 800 ^(155/250/305)	
Spindle taper		A2-11 / A2-15 / A2-20	
Spindle bore	ø mm	155 / 250 / 305	
Quill	ø mm	125 / 165	
Quill stroke	mm	275	
Quill taper	MT	6	
Weight	kg	7000 / 8200 / 9000 / 10000	

Slantbed lathe SB 300 - 500



Machine		SB250	SB300	SB500
Maximum swing	mm	420	505	612
Swing over carriage cover	mm	330	318	420
Maximum turned diameter	mm	200	350	500
Maximum turned length	mm	550	570 / 1000	700 / 1200
Carriage inclination	°	45	45	45
Spindle motor power (S6)	kW	11 / 15	11 / 15	15 / 18.5 (18.5 / 22)
Max. RPM	rpm	6000 (4800)	4500 (6000 / 4000 / 3500)	3500 (2700 / 2500)
Spindle taper		A2-5 (A2-6)	A2-6 (A2-5 / A2-8 / A2-8)	A2-8 (A2-11 / A2-11)
Spindle bore	ø mm	56 (62)	62 (56 / 76 / 86)	86 (101 / 116)
Hole through draw bar	ø mm	44 (52)	52 (44 / 65 / 75)	75 (90 / 105)
Hydraulic chuck diameter	ø mm	160 (200)	200 (160 / 250 / 250)	250 (300 / 380)
Rapid movement	ø mm	12 / 20	20 / 20	20 / 24
Feed rate	mm	10	10	10
X/Z slide way configuration	MK	Linear	Linear / box	Box
Weight	kg	3800	4300 / 4800	5500 / 6000

Mill BT 600 - BT 3000 series



Machine		BT 600	BT 1000	BT 1500E	BT 1500	BT 2000	BT 3000
X-axis movement	mm	600	1000	1500	1500	2000	3000
Y-axis movement	mm	450	550	650	650	800	800 / 1100
Z-axis movement	mm	550	650	600	700	700 / 800	700 / 1100
Bed width	mm	370	580	700	700	1250	1810 / 2550
Work table	mm	700 × 450	1400 × 410	1850 × 610	1850 × 610	2200 × 600	3200 × 800 / 3200 × 1100
T-slots (DIN 650)	mm	5 × 18	3 × 18	5 × 18	5 × 18	5 × 18	5 × 22
Max. table load	kg	300	500	1000	1000	1500 / 2000	3000
Height work table	mm	800	810	850	850	900	950 / 1070
Distance spindle nose to table	mm	110-660	150-800	130-730	80-780	150-850	150-850 / 150-1250
Distance spindle nose to column	mm	545	610	625	660	880	880 / 1190
Main motor power	kW	5.5	7.5 / 11	7.5 / 11	11 / 15	11 / 15 / 18.5 / 22	22 / 37
Max. spindle speed	rpm	8000 - 12000	8000 - 12000	8000 - 10000	6000 - 12000	6000 - 12000	6000 - 10000
Spindle taper		BT-40	BT-40	BT-40	BT-40	BT-40 / BT-50	BT-40 / BT-50
Pressure X-, Y- en Z-as (nom/max)	kN	3 / 6.2 (X en Y) 7.5 / 15 (Z)	7.4 / 14.8	7.4 / 14.8	18.1 / 36.2	15 / 30 (X en Y) 19.2 / 38.5 (Z)	28.9 / 57.9 (X en Y) 36.9 / 73.8 (Z)
Automatic tool changer	#	12 / 16	24		24	24	24
Weight	kg	3000	3800	5300	5800	8500 / 12500	11500 / 23000

Double Column Mill



Machine		2200 BL/LL	2700 BL/LL	3200 BL/LL	4200 BL/LL
X-axis movement	mm	2200	2700	3200	4200
Y-axis movement	mm	1600 / 2000	1600 / 2000	1600 / 2000	1600 / 2000
Z-axis movement	mm	800	800	800	800
Table width	mm	2000 × 1400	2500 × 1400	3000 × 1400	4000 × 1400
T-slots	mm	22 × 7 × 180 22 × 9 × 180	22 × 7 × 180 22 × 9 × 180	22 × 7 × 180 22 × 9 × 180	22 × 7 × 180 22 × 9 × 180
Max. table load	kg	8000	9000	10000	12000
Distance spindle nose to table	mm	150-950	150-950	150-950	150-950
Distance spindle nose to column	mm	1700 / 2100	1700 / 2100	1700 / 2100	1700 / 2100
Main motor power	kW	18.5 / 22	18.5 / 22	18.5 / 22	18.5 / 22
Max. speed	rpm	4500 - 6000	4500 - 6000	4500 - 6000	4500 - 6000
Spindle taper		BT-50	BT-50	BT-50	BT-50
Rapid movement	m/min	12 / 12 / 15	12 / 12 / 15	12 / 12 / 15	10 / 12 / 15
Feedrate	mm/min	0,01 - 7000	0,01 - 7000	0,01 - 7000	0,01 - 7000
Automatic toolchanger	#	32	32	32	32
Weight	kg	20000 / 22000	22000 / 24000	24000 / 26000	28000 / 30000



Machine center MC (3 axis)



Machine		MC 750	MC 1000
X-axis movement	mm	760	1000
Y-axis movement	mm	440	560
Z-axis movement	mm	460	550
Table size	mm	900 x 410	1200 x 520
T-slots (DIN 650)	mm	16 x 100 x 4	16 x 80 / 100 x 5
Max. table load	kg	350	800
Workheight table	mm	820	870
Distance spindle nose to table	mm	100 - 560	100 - 650
Distance spindle nose to column	mm	475	595
Main motor power	kW	5.5 / 7.5	11 / 15 / 18.5 / 22
Max. spindle speed	rpm	8000 (10000 / 12000)	10000 (12000)
Spindle taper		BT40 / CAT40 / DIN69871	BT40 / CAT40 / DIN69871
Automatic toolchanger	#	16 / 24	20 / 24
Weight	kg	3300	5200

Service

Machines, control and maintenance. STYLE is a machine manufacturer from development to final product. With the STYLE manufacturer service you benefit of experienced engineers, an actual component stock and extensive training and helpdesk support on your machine.

By our subsidiaries and extensive dealer network you receive support in your own language, certified technical support and custom training when required.



Machining center 5X series

Locations & showrooms

STYLE CNC Machines	Bunschoten	Holland
Dimatech	Varsseveld	Holland
STYLE CNC Machines BE	Waregem	Belgium
STYLE CNC Machines CZ	Stanovice	Czech Republic & Slovakia
STYLE CNC Machines PL	Katowice	Polen

Machine	STYLE 5X	320 AC	450 AC	500 AC	320 BC	500 BC	630 BC
X-axis movement	mm	600	760	760	1140	1300	1400
Y-axis movement	mm	610	610	610	610	610	710
Z-axis movement	mm	610	560	560	810	810	810
T-slots	mm	12 x 90	14 x 45	14 x 45	18 x 125 x 5	18 x 125 x 5	18 x 125 x 5
Table width		ø 320	ø 450	ø 320	1300 x 610	1450 x 610	1600 x 700
Rotary table bore	mm	ø 50	ø 171	ø 50	ø 70	ø 60 / 50	ø 75 / 60
Max. table load	kg	150 / 150	300 / 250	500	850	850	1200
Distance spindle nose to table	mm	50-660	50-610	35-595	110-920	110-920 / 110-720	180-990 / 110-790
Main motor power	kW	9 / 12	9 / 12	9 / 12	15 / 18	15 / 18	15 / 18
Max. spindle speed	rpm	10000-20000	10000-20000	10000-20000	15000	15000	15000
Spindle taper		ISO 40	ISO 40	ISO 40	DIN 40	DIN 40	DIN 40
Rapid movement X/Y/Z axis	m/min	30 / 30 / 24	30 / 30 / 24	30 / 30 / 24	36 / 36 / 24	36 / 36 / 24	36 / 36 / 24
Feed rate	mm/min	10000	10000	10000	10000	10000	10000
Automatic toolchanger	#	24	24	24	30 / 40 / 60	30 / 40 / 60	30 / 40 / 60
Weight	kg	6500	7000	7100	6500	7200	12000

Correspondence
PO box 136
3750 GC Bunschoten
Holland

Production and showroom
Nijverheidsweg 15
3751 LP Bunschoten
Holland

T +31 33 - 205 25 00
E info@stylecncmachines.com
I www.stylecncmachines.com